
 REMO-HSE	HVC-40M-02	Datasheet
	High Voltage Cable	

Description: Unshielded high voltage cable for 40 kV DC for use in electrostatic applications, e.g. liquid paint, powder coating and flocking systems.

Field of application: Electrostatic applications according to EN 50176 / EN 50177

Installation information: Accessory: multilam plug 4 mm

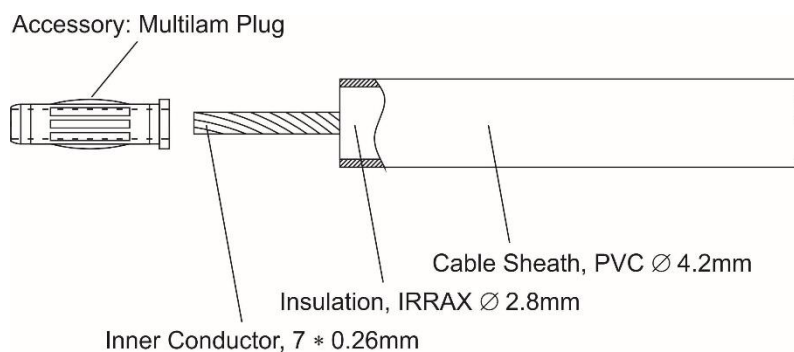

Mechanical Dimensions: ± 0.3 mm

Technical Specifications:

HV-Cable	
Rated Voltage:	40 kV DC
Test Voltage:	60 kV DC acc. to EN 50176/EN 50177
Inner Conductor:	7 × 0.26 mm tin plated annealed copper
Insulation:	IRRAX
Cable Sheath:	PVC
Outer Diameter:	4.2 mm
Bending Radius:	> 15 times outer diameter
Operating Temperature:	-25 to +85°C

2404-2042426

Date: 2019-05-22	REMO-HSE Hochspannungselektronik GmbH, Straubinger Str. 28, D - 94372 Rattiszell Tel.: +49 (0) 9964 / 6406 - 0 * Fax: +49 (0) 9964 / 6406 - 20 * Email: info@remo-hse.de	Page 1 / 1
---------------------	---	---------------

The performance and specifications are subject to change without prior notice